



VESDA®

Smoke Detection on Trains

- Minimize asset loss from arson
- Ensure passenger safety from fire
- Reduce service disruption caused by overheating electrical equipment
- Monitor smoke levels for passenger comfort




Vision Systems

Trains—a unique fire engineering challenge

The challenge

Whilst the fire load of a typical passenger rail car is low, the possibility of arson or electrical fires is high. The loss of life and property damage caused by a fire in introduced materials can be potentially tragic. Such losses can be minimized by ensuring the earliest possible detection of a fire, thus allowing appropriate action to be taken.

Passenger railcars represent a unique challenge for engineers designing a fire detection system. Traditional point-type smoke detectors are not suited to trains. High levels of dust and lint frequently cause them to false alarm. Also, the high airflow in a rail car dilutes smoke, making the detection of low levels of smoke difficult for these detectors that passively wait for smoke to reach them.

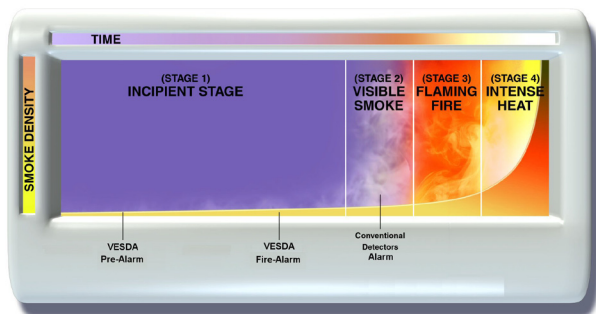

Fire Growth Curve


VESDA detectors offer multiple alarm levels. This allows the widest possible window of opportunity to detect and manage fire threats.

The VESDA solution

A VESDA very early warning smoke detection system, contained within the HVAC system on a passenger rail car, is the ideal solution for smoke detection on trains.

VESDA—the world's leading air sampling smoke detection system—provides the earliest possible warning of a potential fire event by detecting smoke particles at the incipient stage of fire. (*Refer to Figure below*). Detection at this early stage enables proactive investigation of the source of the smoke. Action can be taken before the fire escalates. Loss of life from smoke inhalation can be prevented. A safe evacuation can be managed.

An additional benefit of very early warning is the protection of service provision. With the overheating of dense electrical and switching systems being a common cause of service disruption, detecting the very low levels of smoke produced by such overheating allows action to be taken before service is disrupted.

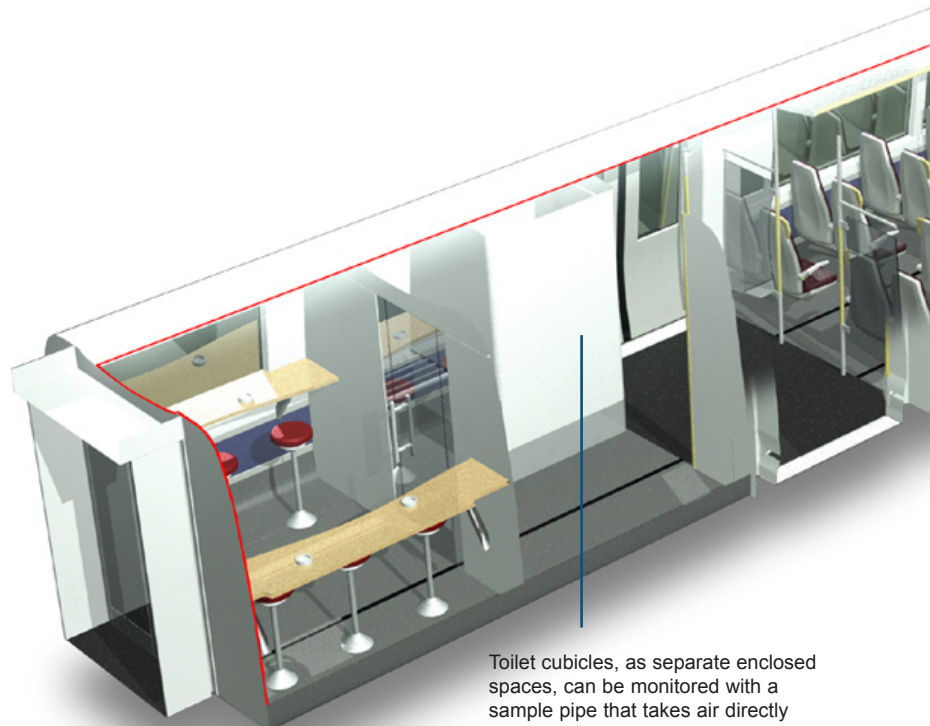

Toilet cubicles, as separate enclosed spaces, can be monitored with a sample pipe that takes air directly from the cubicle to the detector. If a fire incident, such as a cigarette butt tossed into a waste bin, does occur the train driver will receive the earliest possible warning of the risk.



Integrating smoke detection with the HVAC

Placing air sampling smoke detection in the plenum of the HVAC system offers many advantages:

- Installing the detector within the plenum ensures a relatively stable operating environment, with constant temperature and humidity.
- The return air filter* of the HVAC system removes dust and lint from the air before it reaches the smoke detector. This reduces maintenance.
- The HVAC system acts as a turbo-charged smoke delivery system. This ensures that air samples are collected from all areas of the rail car.
- Access to the detector is simple. Opening the HVAC plenum allows direct access for maintenance.
- The smoke detection system is completely concealed and one less target for vandals


Reducing the cost of ownership of smoke detection on trains

Programmable sensitivity enables the detector to reliably distinguish between low level risks and real threats to service continuity, property or life. The cost of responding to alarms is reduced without compromising safety.

For example, suspected cigarette smoking or other threats to passenger comfort, might be verified during a routine inspection. High levels of smoke might activate emergency procedures.

VESDA detectors have a built-in self-health check. Fault indicators will indicate when maintenance is required, saving on the cost of routine preventative maintenance.

Easy integration of the smoke detector into the train management system (TMS/TOS) via the HVAC interface.

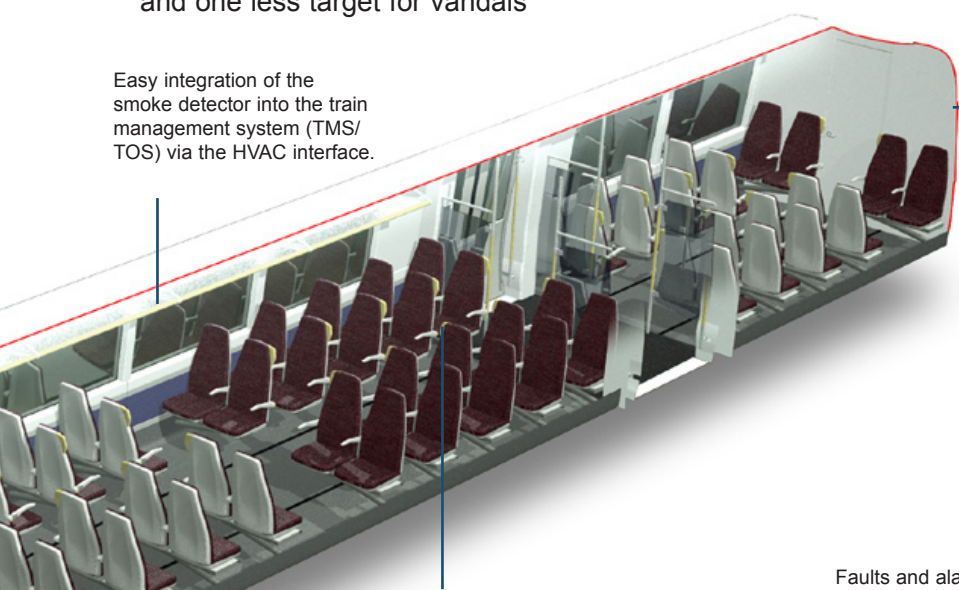

Specific sampling points can be placed where there is a high fire risk, such as in switch cabinets

The high airflow of a train salon dilutes smoke, making traditional point detectors ineffective. By placing an air sampling smoke detector in the HVAC plenum, the airflow brings the smoke to the highly sensitive detector. This also removes the need for a pipe network to support the detector, reducing installation costs.

Faults and alarms can be relayed to the driver interface in the engine cab. The VESDA detector generates an incident log that can be later used for investigation purposes.



*Each application requires validation.

VESDA—From Vision Systems



Why VESDA?

VESDA high sensitivity air sampling very early warning smoke detection systems lead the world, with over 185 000 detectors installed worldwide.

Comprehensive product range—meets varied application needs

Fault tolerant and reliable—reduces false alarms and cost of ownership

World's widest sensitivity range—VESDA can trigger a response appropriate for the level of fire threat

Recognized as the global benchmark technology—have confidence that you are getting the latest, proven technology

Why Vision Systems?

Global sales and service network—support wherever you need it

Dedicated team of Applications Engineers—from ideas to system validation

Custom solutions—our OEM team can design a solution for your application

The Americas

Vision Systems
700 Longwater Drive,
Norwell, Massachusetts
02061, USA

Ph +1 781 740 2223
Toll Free 800 229 4434
Fax +1 781 740 4433

www.vesda.com/oem

Australia and Asia

Vision Systems
495 Blackburn Road
Mount Waverley VIC 3149
Australia

Ph +61 3 9211 7200
Fax +61 3 9211 7202

Europe and the Middle East

Vision Systems
Vision House
Focus 31 Mark Road
Hemel Hempstead
Herts HP2 7BW UK

Ph +44 1442 242 330
Fax +44 1442 249 327

This publication is a guide only. Do not cite this document as a requirement or specification for system design.
For more information, please contact your nearest VESDA office.

The manufacturer reserves the right to change designs or specifications without obligation and without further notice. VESDA, LaserTEKNIC, LaserPLUS, LaserSCANNER, LaserCOMPACT, LaserFOCUS, VESDAnet, VESDAlink, ASPIRE, ASPIRE2, AutoLearn, VSM, VConfig, InfoWORKS, PROACTIV, PRECISION, VSC, ADPRO, FastTrace, FastVu, FastScan, Axiom, PRO, Amux and Video Central are trade marks used under licence. This document is protected by copyright under the laws of Australia and other jurisdictions throughout the world. It must not by any means, either in whole or part, be reproduced, communicated to the public, adapted, distributed, sold, modified, published except as permitted by any laws or statute or with prior written consent of VFS International Pty Ltd. Copyright ©2004 VFS International Pty Ltd ACN 100 259 381



Vision Systems