

Clock Accessories

Synchronous- Non Corrective 220VAC Type - 5

Clipsal 409/3 3Pin Plug Top & 408/3 3Pin Clock Point Recessed Socket
 Technical Datasheet

Introduction

Simplex Synchronous- Non Corrective 220VAC Type -5 Clocks [Series 0057 Synchronous Non Corrective] are supplied with Clipsal 409/3 3Pin Plugs

The recommended installation uses a Clipsal 408/3 3Pin Clock Point recessed Socket to receive the Clipsal 409/3 3Pin plug fitted to the clock.

Dimensions

Clock Point Plug

- Clock Point Plug 49 x 35mm
- Terminal accommodate 0.75mm² 24/0.2mm flexible cord

Clock Point Recessed Socket


- Clock Point Recessed Socket 59 x 106mm
- Mounting Center 84mm
- Base Projection 25mm
- Terminals accommodate 2 x 2.5mm² TPS Cable.
- Cut out Size for Flush Mounting 73 x 43mm.



Clipsal 408/3 3Pin
 Clock Point Socket



Clipsal 409/3
 3Pin Plug

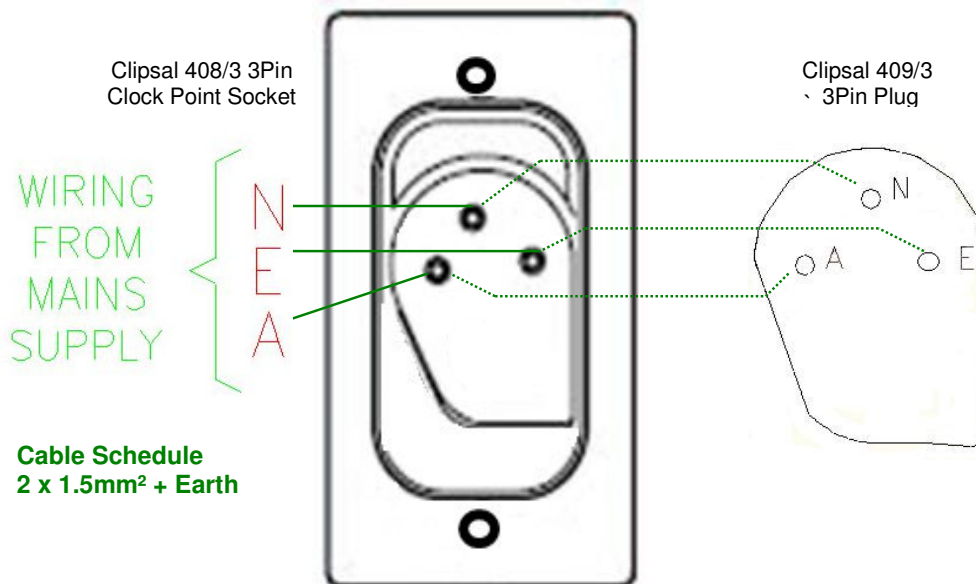

Contact Us

Website: www.simplextime.com.au
 Email: simplextime.au@tycoint.com
 Phone: 131 491
 Document: Clipsal 408/3 3Pin Base & 409/3 3Pin Plug Datasheet.doc
 Revision: Issued Feb 2009