

Clock Accessories

Two Wire Duplex 24vdc Impulse Type S.R. -2

Clipsal 409/3A 3Pin Plug & 408/3A 3Pin Clock Point Recessed Socket
 Technical Datasheet

Introduction

Simplex Two Wire Duplex 24VDC Impulse Type S.R.-2 Clocks [Series 0054 Impulse Clocks] are supplied with Clipsal 409/3A 3 Pin Plugs.

The recommended installation uses a Clipsal 408/3A 3 Pin Clock point recessed Socket to receive the Clipsal 409/3A 3 Pin plug fitted to the clock.



Clipsal 408/3A
3Pin Clock Point
Socket



Clipsal 409/3A
3Pin Plug


Dimensions

Clock Point Plug

- Clock Point Plug 49 x 35mm
- Terminal accommodate 0.75mm² 24/0.2mm flexible cord

Clock Point Recessed Socket

- Clock Point Recessed Socket 59 x 106mm
- Mounting Center 84mm
- Base Projection 25mm
- Terminals accommodate 2 x 2.5mm² TPS Cable.
- Cut out Size for Flush Mounting 73 x 43mm.

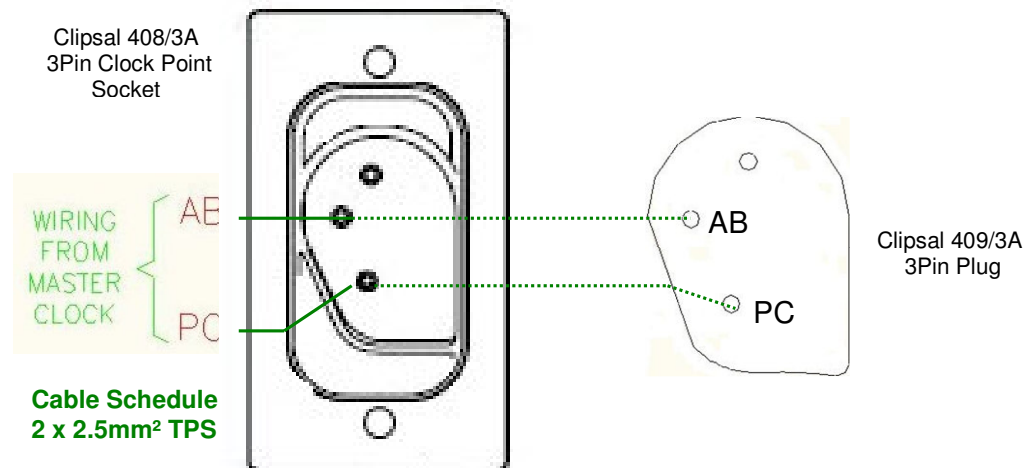

Contact Us

Website: www.simplextime.com.au
 Email: simplextime.au@tycoint.com
 Phone: 131 491
 Document: Clipsal 408/3A 3 Pin Base & 409/A 3 Pin Plug.doc
 Revision: Issued Feb 2009